


# Mobile Cutoff Bin

## Materials List


|   |                    |  |   |           |  |
|---|--------------------|--|---|-----------|--|
| A | Front Dividers (2) | 7 x 23 <sup>1</sup> / <sub>4</sub> - 3/4 Ply.                              | I | Shelf (1) | 5 <sup>1</sup> / <sub>4</sub> x 40 - 3/4 Ply.  |
| B | Bin Front/Back (2) | 23 <sup>1</sup> / <sub>4</sub> x 38 <sup>1</sup> / <sub>2</sub> - 3/4 Ply. | J | Back (1)  | 23 <sup>1</sup> / <sub>4</sub> x 40 - 3/4 Ply.   |
| C | Rear Dividers (3)  | 5 <sup>1</sup> / <sub>2</sub> x 23 <sup>1</sup> / <sub>4</sub> - 3/4 Ply.  |   |           |  |
| D | Rails (4)          | 1/2-dia. x 39 <sup>1</sup> / <sub>4</sub> EMT Conduit                      |   |           |  |
| E | Sides (2)          | 14 x 23 <sup>1</sup> / <sub>4</sub> - 3/4 Ply.                             |   |           |  |
| F | Bottom (1)         | 20 <sup>1</sup> / <sub>2</sub> x 40 <sup>1</sup> / <sub>2</sub> - 3/4 Ply. |   |           |  |
| G | Cleats (3)         | 3/4 x 1 <sup>1</sup> / <sub>2</sub> - 12 <sup>5</sup> / <sub>16</sub>      |   |           |  |
| H | Blocking (4)       | 3 x 5 <sup>1</sup> / <sub>4</sub> - 3/4 Ply.                               |   |           |  |
|   |                    |  |   |           | <ul style="list-style-type: none"> <li>• (69) #8 x 1<sup>1</sup>/<sub>2</sub>" Fh Woodscrews</li> <li>• (2) 4"-dia. Locking Swivel Casters</li> <li>• (2) 4"-dia. Swivel Casters</li> <li>• (16) #12 x 3/4" Ph Woodscrews</li> </ul> |

## Cutting Diagram

48" x 96" - 3/4" PLYWOOD

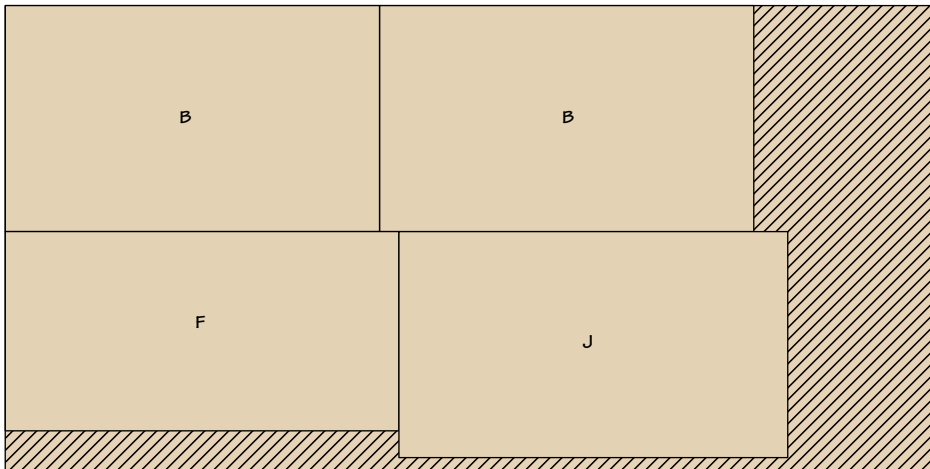

48" x 48" - 3/4" PLYWOOD

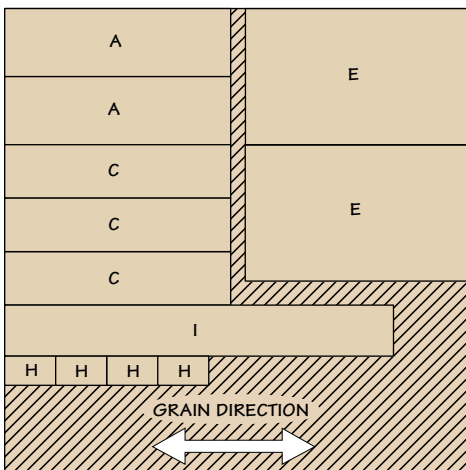

3/4" x 3 1/2" - 48" HARDWOOD (1.2 Bd. Ft.)

